



MM-380A

Handheld Weld Checker


- Battery operated handheld weld checker for quality control of welding applications
- Compact, economic and multi-functional device
- Measures current, voltage, welding time, weld force and displacement*
- MM-380A can be used with single-phase AC type, DC inverter type, AC inverter type and transistor type
- Easy operation: Turn the dial to scroll and move a cursor. Press the dial to select.
- Clear color LCD: 320 x 240 dots and 4.7 inch sized color LCD
- Various displays: Easy-to-check various waveforms
- FIT function: Possible to move and zoom
- Multilingual software: English, German, French and Spanish
- Memory and output:
 - Measured values and waveforms can be saved in a built-in memory
 - Measured data can be sent to a PC through RS-232C
 - Measured data can be printed out to a dedicated printer

CONFIGURATION OPTIONS

The MM-380A is designed to check weld current, welding time, voltage and weld force with a compact easy to operate handheld unit which perfectly meets the needs of various industries such as Automotive, Electronics, Batteries, Medical, IT&Multimedia and Aerospace.

The MA-710A/MA-711A weld through sensor is capable of simultaneous measuring of weld force and weld current. A dedicated printer can print out measured data and waveform. The external datacom function can receive and measure voltage signals even from other sensors (+/- 10V at max.). Amada Miyachi Europe recommends a variety of coils such as MB-400K and force sensors upon request.

TYPICAL APPLICATIONS



Weld Thru Sensor
MA-710A / MA-711A



Optional printer BL2-58PN-MYT



MB-400K



TECHNICAL SPECIFICATIONS

Model	MM-380A	
Current	Range	① 0.100 to 2.000 kA ② 0.30 to 6.00 kA ③ 1.00 to 20.00 kA ④ 3.0 to 60.0 kA ⑤ 10.0 to 200.0 kA
	Item	Arithmetic mean RMS / PEAK
	Accuracy*	When in range of ①, ③ or ⑤: +/- (1%rdg+9 to 20dgt) When in range of ② or ④: +/- (1%rdg+3 to 7dgt)
Voltage	Range	⑦ 0.30 to 6.00 V ⑧ 1.0 to 20.0 V
	Item	Arithmetic mean RMS / PEAK
	Accuracy	+/- (1%rdg + 3dgt)
Welding time	Range	AC mode: 50 Hz: 0.5 to 500.0cyc / 60 Hz: 0.5 to 600.0cyc DC mode: 1 to 2000 ms
Force	Range	4.90 to 98.06N (MA-520), 49.0 to 980.6N (MA-521) 490 to 9806N (MA-522), 245 to 4903N (MA-770A), 490 to 9806N (MA-771A)
	Time	1 to 6000 ms
	Accuracy	+/- (F/S error of loadcell +2%rdg +29dgt)
Conduction angle measurement		0 to 180 degree (Only for CYC mode)
Number of schedule		127
Printer*		BL2-58PN-MYT**
Bidirectional communication		Measured data read and write: waveform, measuring results, schedule, report of weld cycles and forces, screen copy
Displacement value indication		Normal mode: + (plus) indication Reverse mode: - (minus) indication
Power requirements		DC9 V (AC adapter: Single phase, 100 to 240 VAC +/-10%, 50/60 Hz)
Power consumption		Approx. 20 W
Weight		Approx. 900g


*Dependent on the power supply system

**Option


WEIGHT & DIMENSIONS

MM-380A = 900g


Dimensions in mm

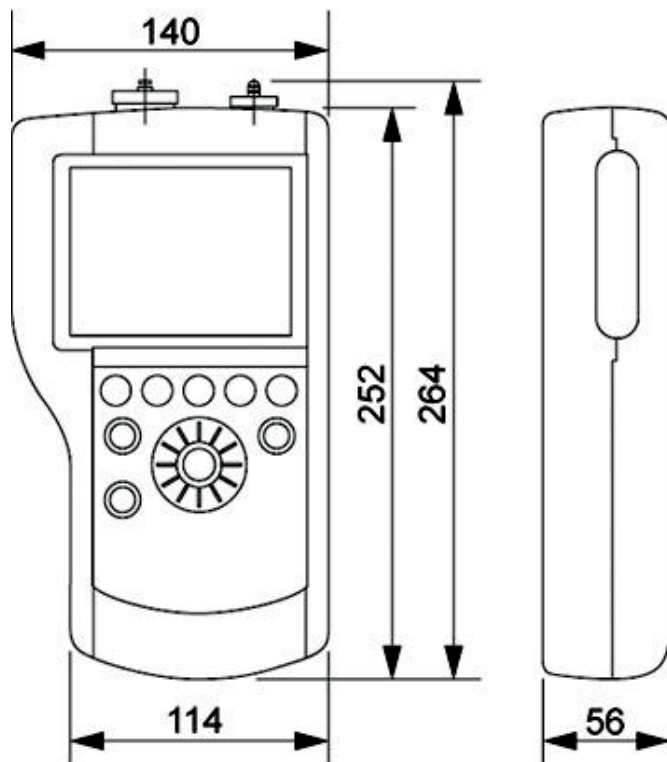

DISPLAY (4.7 INCH COLOR LCD)

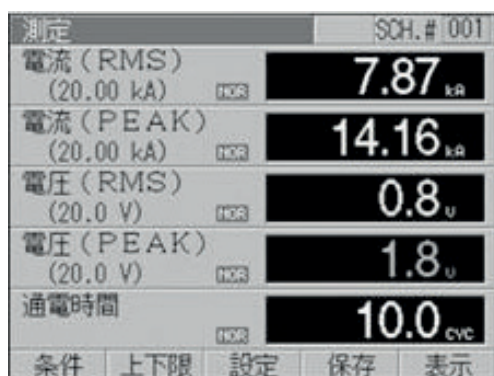

Measured values

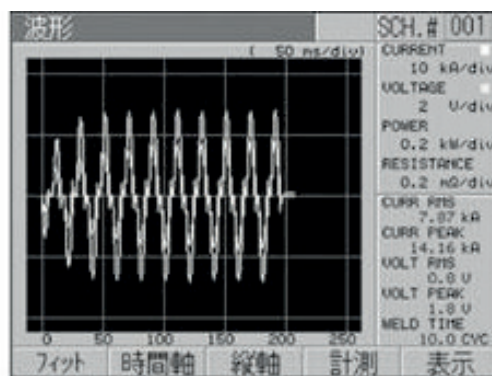

Waveforms



Lindberghstrasse 1 • DE-82178 Puchheim, Germany
T: +49 (0) 89 83 94 030 • Fax: +49 (0) 89 839403 68
infode@amadamiyachi.eu • www.amadamiyachieurope.com
ISO 9001 Certified Company

MIYACHI UNITEK | MIYACHI PECO | MIYACHI EAPRO

EUROPE

Amada Miyachi Europe BV
Helmond, The Netherlands
T: +31 (0) 492 542 225
info@amadamiyachi.eu

Amada Miyachi Europe Kft.
Budapest, Hungary
T: +36 1 431 9927
infohu@amadamiyachi.eu

Amada Miyachi Europe
Derby, United Kingdom
T: +44 (0) 1332 361 238
info@amadamiyachi.eu

Amada Miyachi Europe
Saint Germain en Laye, France
T: +33 (0) 139 046 430
infofr@amadamiyachi.eu

Amada Miyachi Europe
Torino, Italy
T: +39 011 223 83 16
infoit@amadamiyachi.eu

Amada Miyachi Europe
Prague-West, Czech Republic
T: +420 251 512 157
info@amadamiyachi.eu

AMERICAS

Amada Miyachi America Inc.
Monrovia, CA, USA
T: +1-626-303-5676
info@amadamiyachi.com

Amada Miyachi do Brasil Ltda.
Sao Paulo, Brasil
T: +55-11-4193-1187
antonio.ruiz@miyachi.com

ASIA

Amada Miyachi Co., Ltd.
Noda, Japan
T: +81-4-7125-6177
sales@miyachi.com

Amada Miyachi Shanghai, Co., Ltd.
Shanghai, China
T: +86-21-6448-6000
zqzhang@msc.miyachi.com

Amada Miyachi Korea Co., Ltd.
Gyeonggi-do, Korea
T: +82-31-8015-6810
dykim@mkc.miyachi.com

Amada Miyachi Taiwan Co., Ltd.
Taipei, Taiwan R.O.C.
T: 886-2-2397-4778
keigaku@miyachi.com

Amada Miyachi (Thailand) Co., Ltd.
Samutprakarn, Thailand
T: +66-2751-9337-8
info@mtl.miyachi.com

Amada Miyachi Vietnam Co., Ltd.
Ho Chi Minh City, Vietnam
T: +84-8-3771-7972

Amada Miyachi India Pvt., Ltd.
Bangalore, Karnataka
info@miyachiindia.com

All data, images and text are subject to change at any time. Amada Miyachi Europe GmbH reserves the right to change, modify, delete and add technical specifications and product details at any time without prior notification. © 2015 Amada Miyachi Europe GmbH.

follow us on:

